



NIVELAND® 10R

Fast-drying self-leveling mortar for layers of up to 10 mm



DESCRIPTION

Self-levelling mortar fast and high performance, for indoor floors preparation. Once hardened, it is suitable for all kind of light floorings (tiles, parquet, fitted carpet, etc.).

TECHNICAL CHARACTERISTICS

Product based on special cements, selected aggregates and additives.

ADVANTAGES AND USES

- Indoor floor levelling.
- High mechanic resistance.
- High resistance to abrasion.
- Excellent levelling qualities.
- Rapid setting.
- Up to 10 mm thickness.

SUITABLE SUBSTRATES

- Concrete, mortar flooring and similar elements.
- Substrates must be resistant, stable, sound and clean, free of dust, demolding agents, organic products, etc.
- With low-porosity substrates, apply a priming coat (TEXTURE FIX) or improve roughness by mechanical means.
- Before applying the paste, make sure that residual moisture is below the recommended proportion (less than 3%).
- Fill voids or holes (two parts NIVELAND and one part sand).


APPLICATION PROCEDURE

- Add water (5.5 to 6 litres per bag) and mix with a low-speed mechanical mixer (500 rpm approx.) until you have an even and fluid paste.
- Let the mixture stand for 2 minutes and remix.
- The manipulation time of the paste is 20 minutes, depending on the weather conditions.
- Pour the mixed product on the base to be set and spread with a levelling trowel.

- Recommended maximum thickness is 2-10 mm.

RECOMMENDATIONS

- Do not apply below 5°C nor above 30°C.
- Do not apply when there is a risk of frost, rain, strong wind or direct sunlight.
- Do not apply on humid floors or when there is a risk of humidity.
- Do not add water once it starts to harden.
- Do not apply outdoors.
- On surface areas greater than 20 m², it is advisable to make partition joints (of 6mm minimum), filling them with an elastic material, such as PUMALASTIC PU.
- On surface areas greater than 12 m², it is advisable to do perimeter joints, filling them with an elastic

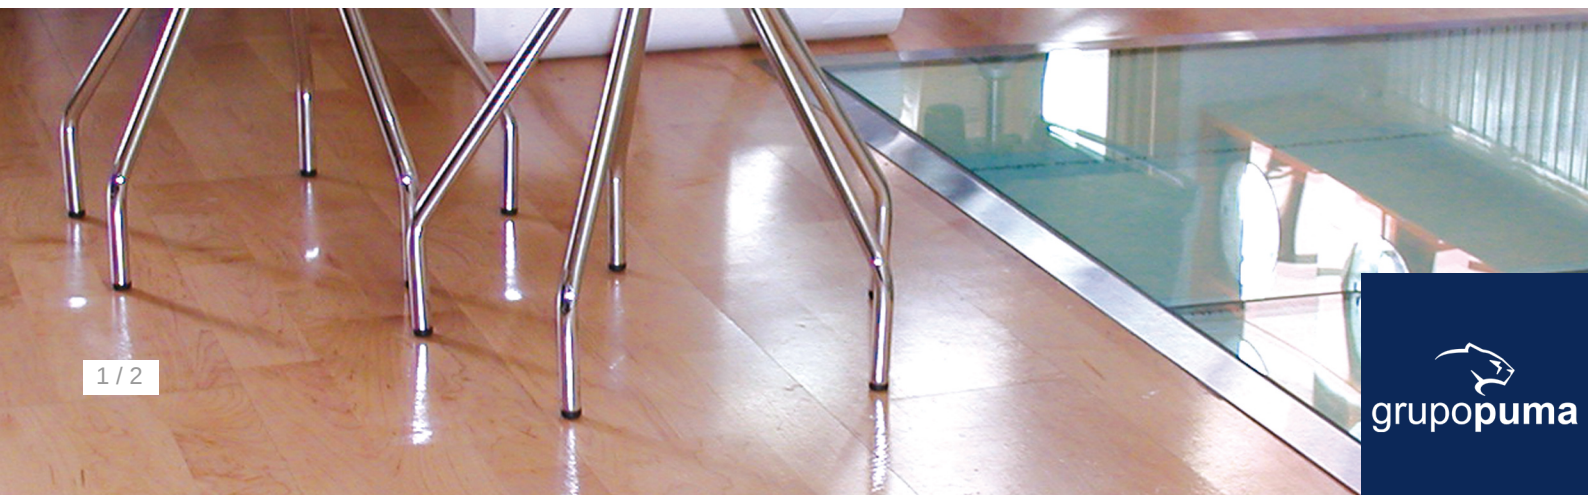

FLOORING

NIVELAND® 10R

PACKAGING AND STORAGE

material.

25 kg plastic-lined paper bags .

Shelf life: 1 year in sealed original packaging, sheltered from weather conditions and humidity.

TECHNICAL DATA

(Statistical data obtained under standard conditions)

Aspect	GREY powder
Adherence to cement	> 2 N/mm2
Resistance to compression	>25 N/mm2
Setting starting time	20 - 30 minutes
Time to wait before walking on surface	2 - 3 hours
Sanding time	4 - 8 hours
Cladding time tiling or wall-to-wall carpet starting	8-12 hours later
Cladding time timber, synthetic floor or paint starting	12- 24 hours later
UNE-EN 13813 Classification	CT C25 F6
Approximate yield	1,5 Kg/m2 per mm of thickness

NOTE: Times shown relate to 23°C temperature and 50% relative humidity. Such times are shorter at higher temperatures and longer at lower temperatures.

LEGAL DISCLAIMER

The instructions for use are given according to our tests and knowledge and do not imply any commitment by GRUPO PUMA nor free the consumer from the examination and verification of the products for their correct use. Claims must be accompanied by the original packaging to allow a proper traceability.

GRUPO PUMA is not responsible, in any case, for the application of its products or constructive solutions carried out by the application company or other parties involved in the process and / or execution of the work, limiting the responsibility of GRUPO PUMA exclusively to the damages directly attributable to the supplied products, individually or integrated in systems, due to failures in their manufacturing process.

In any case, the drafter of the work project, the technical management or the person responsible for the work, or collaterally the application company or other parties involved in the process and / or execution of the work, must ensure the suitability of the products addressing the characteristics of them, as well as the conditions, support and possible pathologies of the work in question.

The values obtained by GRUPO PUMAS's products or its constructive solutions that, as the case may be, are determined by the EN standards or any other regulation that applies to it in each case refers exclusively to the conditions specifically stipulated in said regulation and that are referred to, among others, to certain characteristics of the support, humidity and temperature conditions, etc. without being them required in the tests obtained under different conditions, all in accordance with the relevant regulation.